

Development of Modified Fractional Fluid Flow Equation For Non – Darcy Flow in Computer Simulation of Oil Reservoirs

*¹Akintola, S. A., ²Adeaga, O. A. & ³Muritala, O. K.

*^{1,3}Department of Petroleum Engineering, University of Ibadan, Ibadan. Oyo State. Nigeria.

²Department of Mechanical Engineering, First Technical University, Ibadan. Oyo State. Nigeria

Corresponding Author: sarah.akintola@ui.edu.ng (+2348023363651)

ABSTRACT

Upon the depletion of oil reservoir, huge amount of oil is usually left behind. This oil, in some cases double the initial oil recovered, in order to recover the unrecovered oil, different types of secondary oil recovery techniques can be explored. A more common techniques is water flooding which involve the injection of water into reservoir to displace oil into the wellbore. To determine the relative flow rates of oil and water at any point in a porous flow system while also examining factors such as fluid properties, rock properties, reservoir structural properties, pressure gradient, and flow rate which affect the displacement efficiency of a water flooding project, the fractional flow equation is employed. But the convectonal fractional flow equation is applicable just to Darcy flow. The use of Darcy flow equation is not applicable in low permeability sandstone reservoir, hence non Darcy flow have been used one of such equation is the Forcheimer equation, as a result this study is aimed at modifying the Forcheimer equation and validating the new fractional flow equation using literature . The result obtained showed that the proposed equation predicts better than Forcheimer equation

Keyword: Darcy flow, Forcheimer equation, water flooding fractional flow equation,

Proceedings Reference Format

Akintola, S.A., Adeaga, O.A. & Babalola, D.A. (2021): Development of Modified Fractional Flow Equation For Non – Darcy Flow in Computer Simulation of Oil Reservoirs. Proceedings of the 27th iSTEAMS Multidisciplinary Innovations & Technology Transfer (MINTT) Conference. Academic City University College, Accra, Ghana. June, 2021. Pp 407-417 www.isteam.net/ghana2021. DOI - <https://doi.org/10.22624/AIMS/iSTEAMS-2021/V27P38>

1. INTRODUCTION

It is generally acknowledged that the first water flooding occurred as a result of an accidental water injection in the Pothoic city area of Pennsylvania in 1865. In 1880 John F CarlI concluded that oil recovery might be increased by the injection of water into the reservoir to displace oil to producing wells. Primary oil recovery under natural producing mechanisms (i.e. liquid and rock expansion, solution gas drives, gas cap drive and natural water influx) leaves behind 50% to 80% of the original oil in place consequently, a vast amount of oil remains unrecovered. A rule-of-thumb is that water flooding will recover half-again as much oil as was produced under primary. Water flooding is known to be one of the economical and widely used post-primary recovery method for light-to medium-oil reservoirs. Water flooding is usually a secondary drive mechanism initiated before or after the depletion of the primary drive mechanism of the reservoirs.

Prediction and understanding of water flooding performance began with the Fractional Flow Curve (FFC), where fractional flow (for Darcy) equation and capillary pressure gradient is used to show the relationship between fraction of water flowing in the reservoir and water saturation. The fractional flow equation uses Darcy's Law to relate the fraction of displacing fluid to the total flow stream, at any point in the reservoir. Darcy's Law (equation 1.0) was applied at low flow rate (Laminar flow) which are found throughout the oil reservoir.

$$q = -\frac{KA}{\mu} \frac{\delta P}{\delta S} \quad (1.0)$$

And Darcy's law state that the velocity of a homogeneous fluid in a porous medium is proportional to the pressure gradient and inversely proportional to the fluid viscosity, which is presented in equation 2.0

$$v = -\frac{k}{\mu} \frac{\delta p}{\delta s} \quad (2.0)$$

Buckley Leverett (1941) used the concept of Fractional flow, beginning with Darcy's law for water and oil in a 1-D flow, formulated the Fractional flow equation presented in equation 3.0

$$f_w = \frac{1 + \frac{0.001127k_0A}{\mu_0 q_t} \left[\frac{\partial P_c}{\partial x} - 0.00694(\rho_w - \rho_o) \sin \sin \theta \right]}{1 + \frac{\mu_w K_0}{\mu_o k_w}} \quad (3.0)$$

Forchheimer, P (1901) was the first to suggest a non-linear relationship between hydraulic gradient and flux at large Reynold number and Zeng et al (2001) on non-Darcy flow in low permeable sandstones reservoir. The inertia effect takes the form of distorted flow path and turbulent flow of different location in the reservoir. This effect is accounted for in the Forcheimer fractional flow equation (equation 4.0).

$$-\frac{\delta P}{\delta S} = \frac{\mu V}{k} + F_t P V^2 \quad (4.0)$$

Li and et al., (2001) perform experiment on Berea sandstone core to stimulate wafer non- Darcy flow proposed a correlation for predicting Forcheimer coefficient as given in equation 5.0

$$k' = \frac{k\phi}{11500} \quad (5.0)$$

2. METHODOLOGY

According to Darcy's flow equation; q_w is presented in the equation 6.0

$$q_w = -0.001127 \frac{K_w A}{\mu_w} \left[\frac{\delta P_w}{\delta s} + 0.00694 \rho_w \sin \sin \theta \right] \quad (6.0)$$

Modifying this for non-darcy flow, using Forcheimer equation to obtain the equation 7.0

$$\frac{\delta p}{ds} = -\frac{\mu}{k} q - \frac{\rho}{k^1} q^2 \quad (7.0)$$

$$q_w = -0.001127 \frac{K_w A}{\mu_w} \left[\frac{\mu_w}{k_w} q_w - \frac{\rho_w}{k^1_w} q_w^2 + 0.00694 \rho_w \sin \sin \theta \right]. \quad (8.0)$$

Rearranging and collecting the water phase and the oil phase, the equation 9.0 and 10.0, respectively, is developed.

$$\left[-\frac{\mu_w}{k_w} q_w - \frac{\rho_w}{k^1_w} q_w^2 \right] = -\frac{q_w \mu_w}{0.001127 k_w A} - 0.00694 \rho_w \sin \sin \theta \quad (9.0)$$

For oil phase;

$$-\left[\frac{\mu_o}{k_o} q_o - \frac{\rho_o}{k^1_o} q_o^2 \right] = -\frac{q_o \mu_o}{0.001127 k_o A} - 0.00694 \rho_o \quad (10.0)$$

$$\text{But capillary pressure, } P_C = P_O - P_W \quad (10.0a)$$

Applying the equation 10.0a Thus;

$$\left[-\frac{\mu_o}{k_o} q_o - \frac{\rho_o}{k^1_o} q_o^2 \right] - \frac{\mu_w}{k_w} q_w - \frac{\rho_w}{k^1_w} q_w^2 = \frac{q_w \mu_w}{0.001127 k_w A} - \frac{q_o \mu_o}{0.001127 k_o A} + 0.00694 (\rho_w - \rho_o) \sin \sin \theta \dots \quad (11.0)$$

$$\text{Given } q_t = q_o + q_w \quad (11.0a)$$

$$\text{and. } q_o = q_t - q_w \quad (11.0b)$$

Applying the equations 11.0a and 11.0 b Thus;

$$\left[-\frac{\mu_o}{k_o} (q_t - q_w) - \frac{\rho_o}{k^1_o} (q_t - q_w)^2 \right] - \left[-\frac{\mu_w}{k_w} q_w - \frac{\rho_w}{k^1_w} q_w^2 \right] = \frac{q_w \mu_w}{0.001127 k_w A} - \frac{q_o \mu_o}{0.001127 k_o A} + 0.00694 (\rho_w - \rho_o) \sin \sin \theta \quad (12.0)$$

$$-\left[\frac{\mu_o}{k_o} q_t + \frac{\mu_o}{k_o} q_w \right] - \left[\frac{\rho_o}{k^1_o} q_t^2 - 2 \frac{\rho_o}{k^1_o} q_t q_w + \frac{\rho_o}{k^1_o} q_w^2 \right] - \frac{\mu_w}{k_w} q_w - \frac{\rho_w}{k^1_w} q_w^2 = \frac{q_w \mu_w}{0.001127 k_w A} - \frac{q_o \mu_o}{0.001127 k_o A} + 0.00694 (\rho_w - \rho_o) \sin \sin \theta \dots \quad (13.0)$$

$$-\frac{\mu_o}{k_o} q_t + \frac{\mu_o}{k_o} q_w - \frac{\rho_o}{k^1_o} q_t^2 + 2 \frac{\rho_o}{k^1_o} q_t q_w - \frac{\rho_o}{k^1_o} q_w^2 + \frac{\mu_w}{k_w} q_w + \frac{\rho_w}{k^1_w} q_w^2 = \frac{q_w \mu_w}{0.001127 k_w A} - \frac{(q_t - q_w) \mu_o}{0.001127 k_o A} + 0.00694 (\rho_w - \rho_o) \sin \sin \theta \quad (14.0)$$

Collecting like terms;

$$\begin{aligned}
 & 2 \frac{\rho_o}{k_o^1} q_t q_w + \frac{\mu_o}{k_o} q_w - \frac{\rho_o}{k_o^1} q_w^2 + \frac{\mu_w}{k_w} q_w + \frac{\rho_w}{k_w^1} q_w^2 - \frac{q_w \mu_w}{0.001127 k_w A} - \frac{q_w \mu_o}{0.001127 k_w A} \\
 & = \frac{\rho_o}{k_o^1} q_t^2 - \frac{\mu_o}{k_o} q_t + \frac{q_t \mu_o}{0.001127 k_w A} + 0.00694(\rho_w - \rho_o) \sin \sin \theta
 \end{aligned} \tag{15.0}$$

$$\begin{aligned}
 & \left(\frac{\rho_w}{k_w^1} - \frac{\rho_o}{k_o^1} \right) q_w^2 + \left(2 \frac{\rho_o}{k_o^1} q_t + \frac{\mu_o}{k_o} + \frac{\mu_w}{k_w} - \frac{\mu_w}{0.001127 k_w A} - \frac{\mu_o}{0.001127 k_w A} \right) q_w \\
 & + \left(-\frac{\mu_o}{k_o} q_t + \frac{q_t \mu_o}{0.001127 k_w A} - \frac{\rho_o}{k_o^1} q_t^2 - 0.00694(\rho_w - \rho_o) \sin \sin \theta \right) = 0 \dots
 \end{aligned} \tag{16.0}$$

Applying quadratic formula 17.0;

$$q_w = \frac{-\beta \pm \sqrt{\beta^2 - 4(\alpha)(\gamma)}}{2\alpha} \tag{17.0}$$

$$\begin{aligned}
 \text{Where } \alpha &= \left(\frac{\rho_w}{k_w^1} - \frac{\rho_o}{k_o^1} \right); \beta = \left(2 \frac{\rho_o}{k_o^1} q_t + \frac{\mu_o}{k_o} + \frac{\mu_w}{k_w} - \frac{\mu_w}{0.001127 k_w A} - \frac{\mu_o}{0.001127 k_w A} \right) \\
 \gamma &= \left(-\frac{\mu_o}{k_o} q_t + \frac{q_t \mu_o}{0.001127 k_w A} - \frac{\rho_o}{k_o^1} q_t^2 - 0.00694(\rho_w - \rho_o) \sin \sin \theta \right)
 \end{aligned}$$

$$\text{Thus, } f_w = \frac{q_w}{q_t} \tag{18.0}$$

equation 19.0 present the new fractional flow equation

$$f_w = \frac{-\beta}{2q_t \alpha} \pm \frac{1}{2\alpha q_t} \sqrt{\beta^2 - 4\alpha \gamma} \tag{19.0}$$

3. RESULTS AND DISCUSSION

The data obtained from James T. Smith, Water flooding (1997) were used for the input data for the two case scenarios. For Case 1.0, the Tables 1.0, 2.0, 3.0 and 4.0, presents the data for Relative Permeability and Water Saturation; Buckley Leverett Fractional Flow; Modified Fractional Flow and Modified Fractional Flow respectively. While that for case 2.0 input data for Relative Permeability and Water Saturation Data, Buckley Leverett Fractional Flow, Modified Fractional Flow and Modified Fractional Flow are presented in the Tables 5.0, 6.0, 7.0 and 8.0, respectively. The flow chart used in the validation of the Modified Fractional Flow Equation is presented in the fig. 1.0

As seen in the Figs. 2.0 and 3.0, the Modified Fractional Flow Curve attained earlier water breakthrough than that of the Buckley Leverett. This can be attributed to the turbulence effect created by the Non Darcy Flow which will influence the Fractional Flow Curve. The initial slow progressive rate of displacing fluid is due to low permeability and as the turbulence takes effect it then shoot up sharply.



Fig. 1.0: Flow chart for the validation of the Modified Fractional Flow Equation

CASE 1: INPUT DATA (Source: James T. Smith, Water flooding 1997)

Table 1.0: Relative Permeability and Water Saturation Data

Reservoir Data	Relative Permeability and Water Saturation Data		
Average Porosity = 25%	S_w	K_{ro}	K_{rw}
Absolute Permeability = 50 mD	0.2	0.85	0
Density of Water = 62.4 lbm / cc	0.25	0.8	0.002
Density of oil = 55 lbm / cc	0.3	0.61	0.009
Viscosity of oil = $\mu_o = 6.5 \text{ cp}$	0.35	0.47	0.018
Viscosity of water = $\mu_w = 0.9 \text{ cp}$	0.4	0.37	0.029
Average Porosity = 25%	0.45	0.285	0.044
$i_w = 1000 \text{ RB/D}$	0.5	0.22	0.064
$E_A = 100\%$	0.55	0.163	0.086
$q_t = 1000 \text{ RB/D}$	0.6	0.12	0.117
Area = 10 acres	0.65	0.081	0.152
	0.7	0.05	0.19
	0.75	0.027	0.232
	0.8	0.01	0.247
	0.85	0	0.25

Table 2.0: Buckley Leverett Fractional Flow

S_w	K_{ro}	K_{rw}	K_{ro}/k_{rw}	F_w
0.2	0.85	0		
0.25	0.8	0.002	400	0.017735
0.3	0.61	0.009	67.77778	0.096296
0.35	0.47	0.018	26.11111	0.216667
0.4	0.37	0.029	12.75862	0.361457
0.45	0.285	0.044	6.477273	0.527189
0.5	0.22	0.064	3.4375	0.677524
0.55	0.163	0.086	1.895349	0.792121
0.6	0.12	0.117	1.025641	0.875648
0.65	0.081	0.152	0.532895	0.931285
0.7	0.05	0.19	0.263158	0.964844
0.75	0.027	0.232	0.116379	0.984141
0.8	0.01	0.247	0.040486	0.994426

Table 3.0: Modified Fractional Flow

S_w	K_{ro}	K_{rw}	K_w^1	K_o^1
0.2	0.85	0	-	0.0009
0.25	0.8	0.002	0.00000	0.0009
0.3	0.61	0.009	0.00001	0.0007
0.35	0.47	0.018	0.00002	0.0005
0.4	0.37	0.029	0.00003	0.0004
0.45	0.285	0.044	0.00005	0.0003
0.5	0.22	0.064	0.00007	0.0002
0.55	0.163	0.086	0.00009	0.0002
0.6	0.12	0.117	0.00013	0.0001
0.65	0.081	0.152	0.00017	0.0001
0.7	0.05	0.19	0.00021	0.0001
0.75	0.027	0.232	0.00025	0.0000
0.8	0.01	0.247	0.00027	0.0000

Table 4.0: Modified Fractional Flow

α	β	γ	F_w^1
0.0	0.0	0.0	0.0
28640750	815693.1	7,469,232,476.66)	0.016135
6295716	147854.6	-9801997017	0.039446
3081674	2152463	-12722763422	0.063905
1842829	13675224	-16161764419	0.090012
1127183	88474.34	-20982193980	0.136397
667000	-204.319	-27181637947	0.201872
357105.4	-151.693	-36686982436	0.320522
69000	-111.004	-49833234743	0.849837
-247007	-84.6728	-73827084605	1

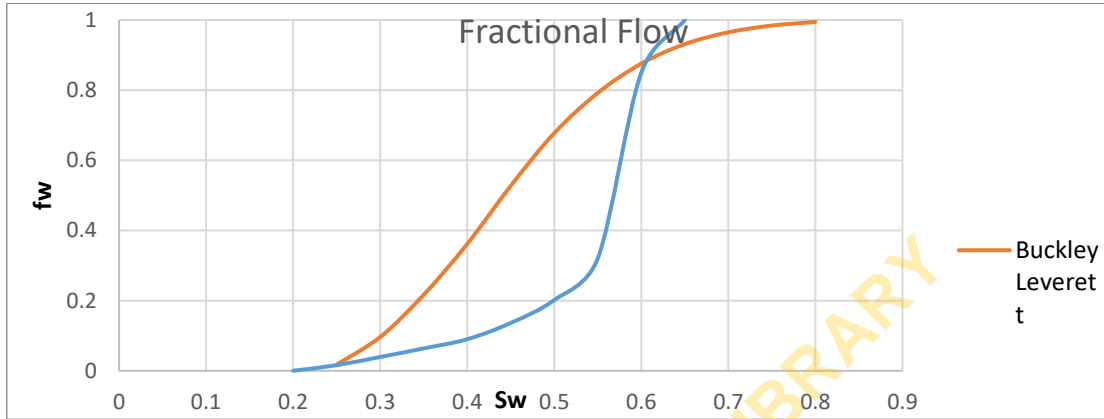


Figure. 1.0: Fractional flow of This model against the Buckley Leverett Method

CASE 2: INPUT DATA (Source: James T. Smith, Waterflooding 1997)

Table 5.0: Relative Permeability and Water Saturation Data

Reservoir Data	Relative Permeability and Water Saturation Data		
	S_w	K_{ro}	K_{rw}
Average Porosity = 18%			
Absolute Permeability = 50 mD	0.2	0.93	0
Density of Water = 62.4 lbm / cc	0.3	0.6	0.024
Density of oil = 55 lbm / cc	0.4	0.36	0.045
Viscosity of oil = $\mu_o = 2.48 \text{ cp}$	0.5	0.228	0.124
Viscosity of water = $\mu_w = 0.62 \text{ cp}$	0.55	0.172	0.168
$i_w = 1000 \text{ RB/D}$	0.6	0.128	0.222
$E_A = 100\%$	0.7	0.049	0.35
$q_t = 1000 \text{ RB/D}$	0.8	0.018	0.512
Area = 10 acres	0.85	0	0.6
Average Porosity = 18%			

Table 6.0: Buckley Leverett Fractional Flow

S_w	K_{ro}	K_{rw}	K_{ro}/K_{rw}	F_w
0.2	0.93	0		0
0.3	0.6	0.024	25	0.137931
0.4	0.36	0.045	8	0.333333
0.5	0.228	0.124	1.83871	0.685083
0.55	0.172	0.168	1.02381	0.796209
0.6	0.128	0.222	0.576577	0.874016
0.7	0.049	0.35	0.14	0.966184
0.8	0.018	0.512	0.035156	0.991288
0.85	0	0.6	0	1

Table 7.0: Modified Fractional Flow

S_w	K_{ro}	K_{rw}	K_w^1	K_o^1
0.2	0.93	0	-	0.00073
0.3	0.6	0.024	0.00002	0.00047
0.4	0.36	0.045	0.00004	0.00028
0.5	0.228	0.124	0.00010	0.00018
0.55	0.172	0.168	0.00013	0.00013
0.6	0.128	0.222	0.00017	0.00010
0.7	0.049	0.35	0.00027	0.00004
0.8	0.018	0.512	0.00040	0.00001
0.85	0	0.6	0.00047	-

Table 8.0: Modified Fractional Flow

α	β	γ	F_w^1
-	-	-	-
3205093	580734.3	(5,281,298,103.99)	0.040502
176636	241946.1	(8,802,371,334.45)	0.074643
334774.9	6164673	(13,898,599,987.30)	0.194756
66011.44	40859141	(18,423,746,427.42)	0.30279
-189886	197631.9	(24,756,924,619.90)	1

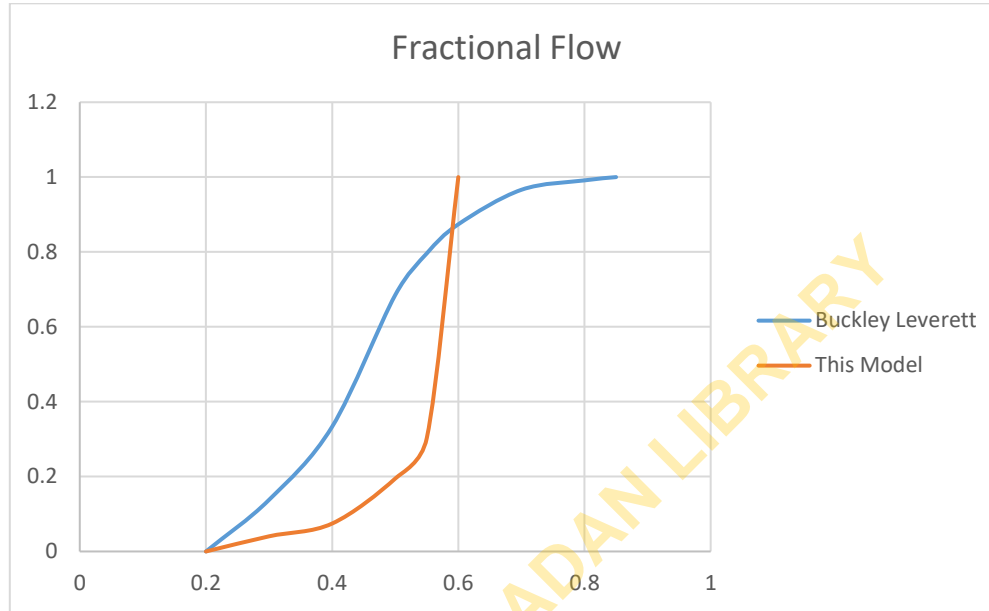


Fig. 2.0: Fractional flow of this model against the Buckley Leverett Method

4. NOMENCLATURE

SYMBOLS	DESCRIPTION
A	Effective pattern area, acres
f_o	Fraction of total flowing stream composed of oil
f_w	Fraction of total flowing stream composed of water
g	Acceleration due to gravity, ft/sq sec
i_w	Fraction of total flowing stream composed of oil
k	Formation absolute permeability
k_o	Effective permeability to oil, md
k_w	Effective permeability to water, md
k_{ro}	Relative permeability to oil, fraction
k_{rw}	Relative permeability to water, fraction
p_c	Capillary pressure = $P_o - P_w$ = pressure in oil phase minus pressure in water phase
q	Flow rate or production rate, B/D
α_d	Angle of formation dip, degrees
μ_o	Oil viscosity, cp
μ_w	Water viscosity, cp
ρ_o	Oil density, gm/cc
ρ_w	Water density, gm/cc
$\Delta\rho$	Density difference, water density minus oil density, gm/cc
Φ	Porosity, fraction

5. CONCLUSION

As evident from the result, the new fractional flow equation (equation 19.0) is proposed for a sandstone reservoir. This equation should be used in place of the usual fractional flow equation for non-Darcy flow. It is recommended that this work can be extended to other reservoir lithologies such as limestone or dolomite.

REFERENCES

1. Buckley, S. E. and Leverett, M. C.: "Mechanism of Fluid Displacements in Sands," Trans., AIME (1942).
2. Craig, F. F. : The Reservoir Engineering Aspects of Water flooding, SPE Monograph Series (1971).

UNIVERSITY OF IBADAN LIBRARY